



| | | | |
|-------------------|--|-------------|--------------------|
| Series | 5000 | Warranty | See Warranty Terms |
| Volts | 6 | BCI | SPEC |
| Cells | 3 | Plates/Cell | 25 |
| Terminal Type | Flag | | |
| Included Hardware | S/S Hex Cap Screw, Nut, Lock & Flat Washer | | |
| Size & Thread | 5/16"-18 | | |

Charge

| | |
|----------------------|---------------------------------|
| Charge Voltage Range | 2.45-2.5 V/cell @ 25°C (77°F) |
| Float Voltage Range | 2.25 V/cell @ 25°C (77°F) |
| Self-Discharge Rate | 5%-10% per month at 25°C (77°F) |

Capacity

| | |
|------------------------------------|--------------|
| Cold Crank Amps (CCA) 0°F / -18°C | 2090 |
| Marine Crank Amps (MCA) 32°F / 0°C | 2612 |
| Reserve Capacity (RC @ 25A) | 2047 Minutes |
| Reserve Capacity (RC @ 75A) | 682 Minutes |

| Capacity Affect by Temperature | 40°C (104°F) | 25°C (77°F) | 0°C (32°F) | -15°C (5°F) |
|--------------------------------|-----------------|----------------|---------------|----------------|
| | 105% | 100% | 75% | 50% |

| Hour Rate | Capacity / AMP Hour | Current / AMPs |
|-----------------|---------------------|-----------------|
| @ 100 Hour Rate | 1100 AH | 11.00 A |
| @ 72 Hour Rate | 1040 AH | 14.45 A |
| @ 50 Hour Rate | 985 AH | 19.70 A |
| @ 20 Hour Rate | 853 AH | 42.64 A |
| @ 15 Hour Rate | 793 AH | 52.87 A |
| @ 10 Hour Rate | 759 AH | 75.90 A |
| @ 8 Hour Rate | 733 AH | 91.68 A |
| @ 5 Hour Rate | 682 AH | 136.45 A |
| @ 1 Hour Rate | 384 AH | 383.76 A |

Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications




| | | |
|-------------------|---------|-----------|
| Weight | 144 kg | 317.5 lbs |
| Length | 55.9 cm | 22" |
| Width | 28.6 cm | 11.25" |
| Height Inc. Term. | 46.4 cm | 18.25" |

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

| | | |
|---------------------|---|-------|
| Electrolyte Reserve | 95 mm | 3.75" |
| Container (Inner) | Polypropylene | |
| Cover (Inner) | Polypropylene - heat sealed to inner container | |
| Container (Outer) | High Density Polyethylene | |
| Cover (Outer) | High Density Polyethylene snap fit to outer container | |
| Handles | Molded | |

Cycle Life vs. Depth of Discharge

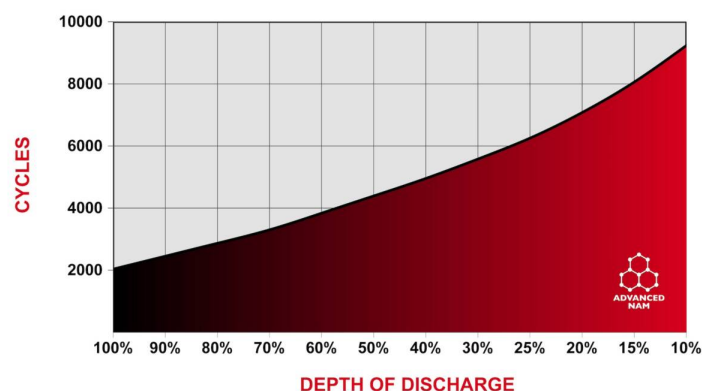

Voltage vs. Depth of Discharge

| DISCHARGE | 0% | 25% | 50% | 75% | 100% |
|---------------|--------|--------|--------|--------|--------|
| 20 HR AH RATE | 2.10 V | 2.05 V | 2.02 V | 1.96 V | 1.75 V |
| 6 HR AH RATE | 2.10 V | 2.04 V | 2.00 V | 1.95 V | 1.75 V |
| 1 HR AH RATE | 2.10 V | 2.03 V | 1.99 V | 1.94 V | 1.75 V |

Detailed Illustration

