



Series	AGM-R	Warranty	See Warranty Terms
Volts	12	BCI	
Terminal Type	F14(M8)		
Size & Thread	M8		

Charge

Charge Voltage Range	14.7V @ 25°C (77°F)
Float Voltage Range	13.8V @ 25°C (77°F)
Recommended Charge Current	20 A
Maximum Charge Current	30 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	6.5 mΩ

Capacity

Hour Rate	Capacity / AMP Hour				Current / AMPs				
@ 20 Hour Rate	111 AH				5.55 A				
@ 10 Hour Rate	105 AH				10.5 A				
@ 5 Hour Rate	89 AH				17.8 A				
Cut Off Voltage		Constant Current Discharge							
1.8 VPC		1 hr	2 hr	3 hr	4 hr	5 hr	8 hr	10 hr	
		55.5	33.3	26.3	20.9	17.8	12.6	10.5	


Specifications

 SAI GLOBAL ISO 9001 Quality	Weight	32.5 kg	71.5 lbs
	Length	50.8 cm	20.0"
	Width	11.0 cm	4.33"
	Height Inc. Term.	23.6 cm	9.29"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	Rope / Plastic Handle

Cycle Life vs. Depth of Discharge

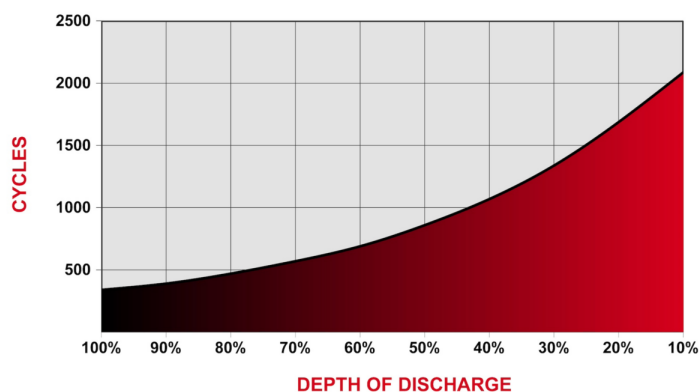

Detailed Illustration

