



Series	AGM-R	Warranty	See Warranty Terms
Volts	12	BCI	
Terminal Type		F6(M8)	
Included Hardware		M8 stainless bolts & washers	
Size & Thread		M8	

Charge

Charge Voltage Range	14.7V @ 25°C (77°F)
Float Voltage Range	13.8V @ 25°C (77°F)
Recommended Charge Current	20 A
Maximum Charge Current	30 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	5.8 mΩ

Capacity

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 20 Hour Rate	95 AH	4.75 A
@ 10 Hour Rate	90 AH	9.0 A
@ 5 Hour Rate	77 AH	15.4 A

Cut Off Voltage	Constant Current Discharge						
	1 hr	2 hr	3 hr	4 hr	5 hr	8 hr	10 hr
1.8 VPC	47.6	28.5	22.5	17.9	15.3	10.8	9


Specifications

 SAI GLOBAL ISO 9001 Quality	Weight	26.5 kg	58.5 lbs
	Length	56.2 cm	22.1"
	Width	11.4 cm	4.49"
	Height Inc. Term.	18.8 cm	7.40"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	Rope / Plastic Handle

Cycle Life vs. Depth of Discharge

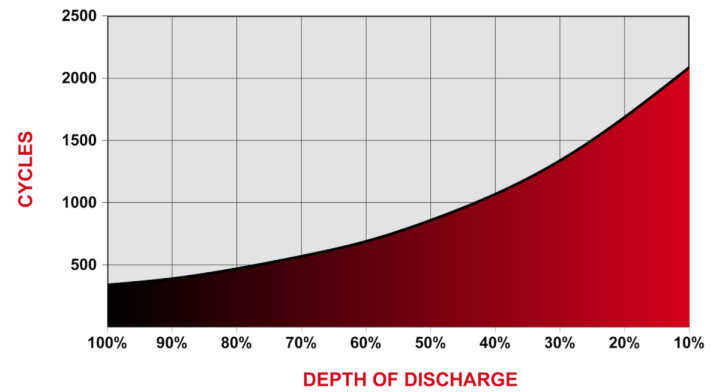

Detailed Illustration

