



Series	GEL	Warranty	See Warranty Terms
Volts	12	Design	Grp 31
Cells	6		
Terminal Type	F12(M8)		
Included Hardware	M8 stainless bolts & washers		
Size & Thread	M8		

Charge | Discharge

Charge Voltage Range	14.3V @ 25°C (77°F)
Float Voltage Range	13.7V @ 25°C (77°F)
Recommended Charge Current	25 A
Maximum Charge Current	35 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	5 mΩ

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	800
Marine Crank Amps (MCA) 32°F / 0°C	1000
Reserve Capacity (RC @ 25A)	220 Minutes
Reserve Capacity (RC @ 75A)	70 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	102%	100%	85%	65%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	120 AH	1.20 A
@ 20 Hour Rate	100 AH	5.0 A
@ 10 Hour Rate	88 AH	8.8 A
@ 5 Hour Rate	78 AH	15.6 A

Cut Off Voltage	Constant Current Discharge					
VPC	1 hr	2 hr	3 hr	5 hr	8 hr	10 hr
	62.1	33	27	18.2	11.9	10.5


Specifications

Weight	29 kg	64 lbs
Length	328 mm	12.91"
Width	175 mm	6.89"
Height Incl. Term.	220 mm	8.66"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	Nylon Strap

Cycle Life vs. Depth of Discharge

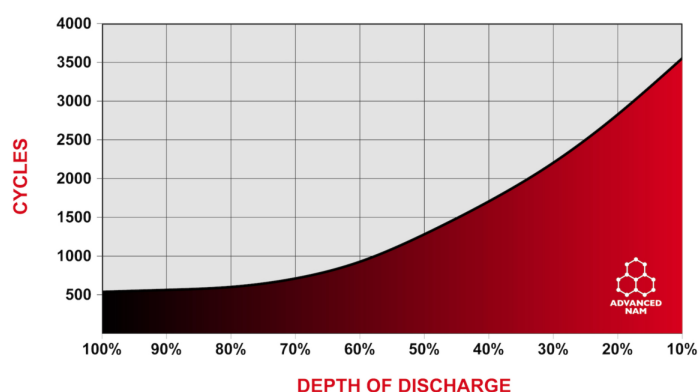

Capacity vs. Temperature

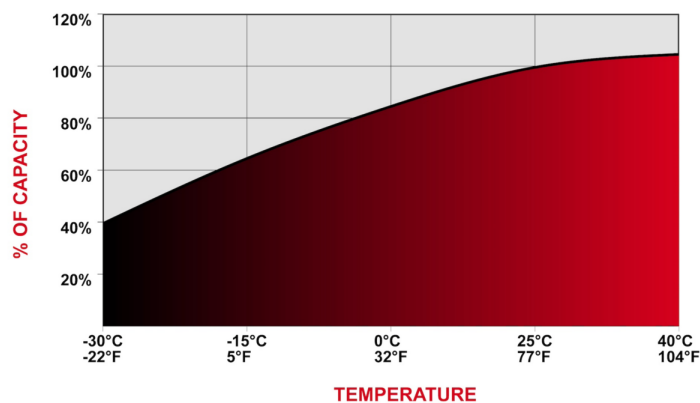

Detailed Illustration

