



Series	GEL	Warranty	See Warranty Terms
Volts	2	Design	2V OPzV
Cells	1		
Terminal Type		F10	
Included Hardware		Threaded Insert & Bolt	

### Charge

Recommended Charge Current	80 A
Maximum Charge Current	240 A
Self-Discharge Rate	Less than 2% per month at 20°C (68°F)
Internal Resistance	0.34 mΩ

### Capacity


Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	89%	79%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	<b>1287 AH</b>	<b>12.87 A</b>
@ 20 Hour Rate	<b>1046 AH</b>	<b>52.3 A</b>
@ 10 Hour Rate	<b>920 AH</b>	<b>92 A</b>


### Specifications

 SAI GLOBAL ISO 9001 Quality	Weight	65.5 kg	144.5 lbs
	Length	191 mm	7.52"
	Width	210 mm	8.27"
	Height Incl. Term.	673 mm	26.5"
Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.			
Container	ABS		
Cover	ABS		
Handles	None		

### Cycle Life vs. Depth of Discharge

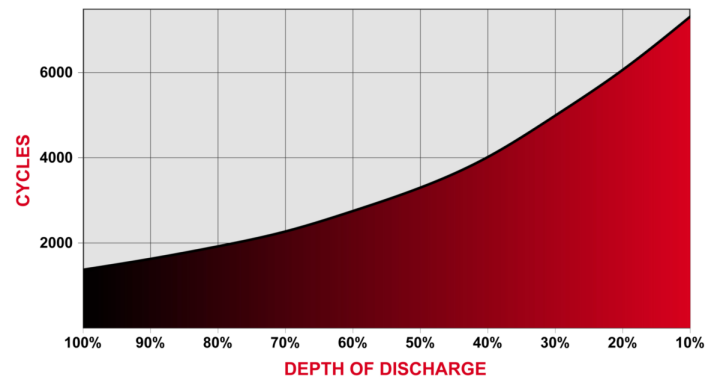

### Capacity vs. Temperature

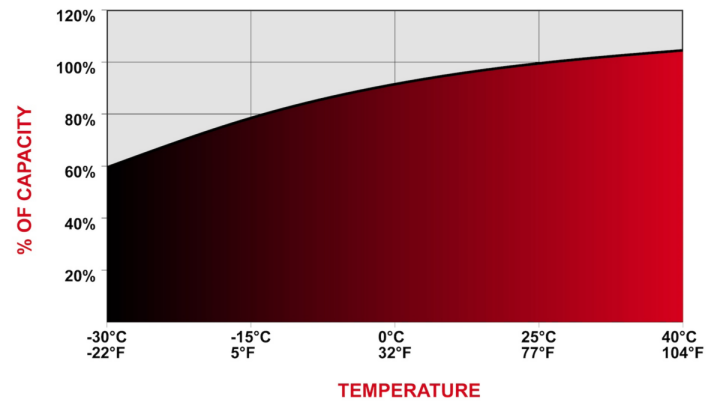

Designed in compliance with applicable BCI, DIN, BS & IEC standards. Tested in compliance to BCI & IEC standards.

