




M8

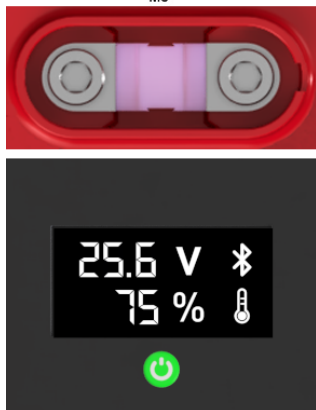

Series	S-Series LFP	Warranty	See Warranty Terms
Volts	24	BCI	G49
Terminal Type	M8		
Included Hardware	M8 stainless bolts & washers		

## Charge

Charge Voltage Range	28.0 - 29.2V
Recommended End of Discharge Voltage	24.0 V
End of Discharge Protection Voltage	20.0 V
Recommended Charge Voltage	28.8 V

## Recommended Charge Current

-20~0°C (-4-50°F)	0.1C	10A
0~10°C (32-50°F)	0.2C	20A
10~35°C (50-95°F)	0.5C	50A
35~50°C (95-122°F)	0.2C	20A

## Charge Mode:

- Charge at recommend voltage & current by temperature until charge current drops to  $\leq 0.05C$  (CC,CV)
- DO NOT USE TEMPERATURE COMPENSATION
- No BTS (Battery Temperature Sensor)

Max Continuous Charge Current	100 A
Max Continuous Discharge Current	100 A
Surge Current Limit	800 A (300ms)
Charge Temperature Range	-20°C~55°C (-4~131°F)
Discharge Temperature Range	-20°~60°C (-4~140°F)
Storage Temperature Range	-5°~45°C (23~113°F)

## Capacity

Nominal Capacity	100 AH
Total Energy	2.56 kWh
Nominal Voltage	25.6 V

## Safety

- Cylindrical LiFePO4 cells [ITR26-70/46E 4.6Ah, 26700] (UL1642)
- IEC62133 (cell), IEC62619(cell), UN38.3 (cell/pack)
- ROHS (cell), CE system certification, IP65 Rating

## Design


- Standard-size (BCI) ABS container for easy VRLA replacement
- Fast charge/discharge performance
- Display & integrated controls
- Visual state-of-charge (SOC)
- External fuse access
- Internal heating for -20°C(-4°F)~0°C(32°F) charging
- Bluetooth Connectivity & dedicated IOS & Android App
- Maintenance-free operation

## Battery Management System (BMS)

- Integrated hardware BMS inside
- Independent charge & discharge protection
- Balance Protection
- Short-Circuit Protection, Over-Voltage Protection, Low-Voltage Protection, Over-Current Protection, Low-Temperature Protection, Over-Temperature Protection

## 24V LFP Profile


## Specifications

 SAI GLOBAL ISO 9001 Quality	Weight	23.5 kg	51.8 lbs
	Length	50.2 cm	19.76"
	Width	18.5 cm	7.28"
	Height Inc. Term.	23.6 cm	9.29"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	Rope / Plastic Handle
Internal BMS Model	8S100ATX-V2
Expected Cycle Life	>6000 @ 80% DOD, >3000 @ 100% DOD
Series Connection	2 UNITS MAX (48V)
Parallel Connection	4 UNITS MAX (48V) or 6 UNITS MAX (24V)
Connectivity	Up to 254P (in 48V configuration) or 156P (in 24V configuration)

## Detailed Illustration

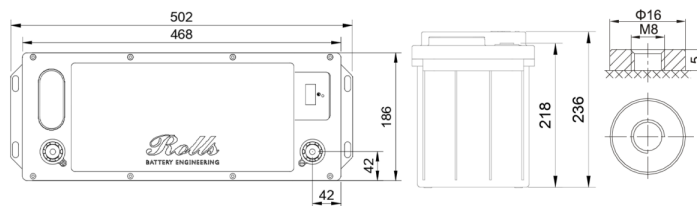

ISO9001



ISO14001



OHSAS18001

