



| | | | |
|-------------------|---|----------|--------------------|
| Series | VRLA AGM-S | Warranty | See Warranty Terms |
| Volts | 8 | Design | GC8T |
| Cells | 4 | | |
| Terminal Type | F14(M8) and TP08 Adapter [+21mm] | | |
| Included Hardware | M8 stainless bolts & washers & TP08 adapter | | |
| Size & Thread | M8 | | |

Charge | Discharge

| | |
|----------------------------|---------------------------------------|
| Charge Voltage Range | 2.45 V/cell @ 25°C (77°F) |
| Float Voltage Range | 2.3 V/cell @ 25°C (77°F) |
| Recommended Charge Current | 35 A |
| Maximum Charge Current | 50 A |
| Self-Discharge Rate | Less than 2% per month at 25°C (77°F) |
| Internal Resistance | 3.2 mΩ |

Capacity

| | | | | |
|-----------------------------------|--------------|-------------|------------|-------------|
| Cold Crank Amps (CCA) 0°F / -18°C | 680 | | | |
| Capacity Affect by Temperature | 40°C (104°F) | 25°C (77°F) | 0°C (32°F) | -15°C (5°F) |
| | 102% | 100% | 85% | 65% |

| Hour Rate | Capacity / AMP Hour | Current / AMPs |
|-----------------|---------------------|----------------|
| @ 100 Hour Rate | 200 AH | 2.0 A |
| @ 20 Hour Rate | 170 AH | 8.5 A |
| @ 10 Hour Rate | 162 AH | 16.2 A |
| @ 5 Hour Rate | 150 AH | 29.9 A |

| Cut Off Voltage | Constant Current Discharge | | | | | | | |
|-----------------|----------------------------|------|------|------|------|------|------|-------|
| | 1 hr | 2 hr | 3 hr | 4 hr | 5 hr | 6 hr | 8 hr | 10 hr |
| VPC | 95 | 57.2 | 43.9 | 35.1 | 29.9 | 25 | 19.9 | 16.6 |


Specifications

| | | |
|--------------------|---------|--------|
| Weight | 34.5 kg | 76 lbs |
| Length | 260 mm | 10.24" |
| Width | 182 mm | 7.17" |
| Height Incl. Term. | 300 mm | 11.81" |

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

| | |
|-----------|-------------|
| Container | ABS |
| Cover | ABS |
| Handles | Nylon Strap |

Cycle Life vs. Depth of Discharge

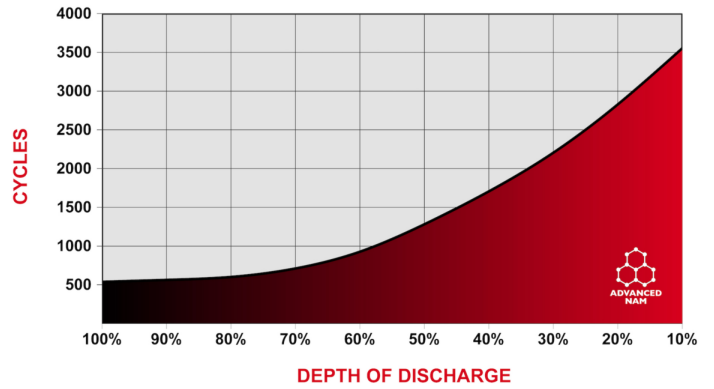

Capacity vs. Temperature

