



32-VOLT UNITIZED RAILROAD BATTERIES

Notice:

Effective January 1, 2025, model numbers have been updated to reference battery voltage for all Rolls 32-volt Railroad & Diesel Starter flooded lead-acid batteries.

Previous Model Number	New Model Number
16 CS 15PR	32 CS 15PR
16 CH 23PQR	32 CH 23PQR
16 CH 23SQR	32 CH23SQR
16 CH 33PR	32 CH 33PR
16 CH 35PR	32 CH 35PR

Please contact our Sales with any questions or concerns.

1.800.681.9914
sales@rollsbattery.com






STAY ON TRACK WITH ROLLS

32V UNITIZED MAINTENANCE-FREE AGM RAILROAD BATTERIES


Specifically designed to meet and exceed the performance requirements of the Railroad industry, Rolls heavy duty 32V maintenance-free VRLA AGM models offer high quality components, durable construction and the same proven reliability and trust earned by the Rolls flooded lead-acid Railroad & Diesel starter product line for over 60 years.

MODEL	LENGTH	WIDTH	HEIGHT	WEIGHT	8HR @ 1.75V	10HR @ 1.75V	20HR @ 1.75V	Max Discharge Current (5 sec)
16 CH 33P	43"	27.5"	20 1/4"	1608 lbs	788	824	916	3443 A
16-660AGM	49 1/4"	28 13/16"	19 1/2"	1507 lbs	635	664	730	3250 A

32V 16-660AGM

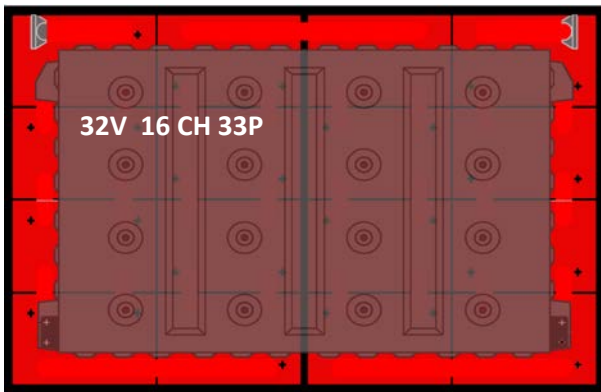

32V 16-510AGM

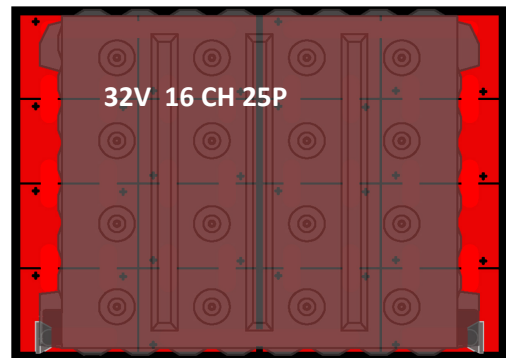

16-660AGM (VRLA) vs 16 CH 33P (FLOODED)

16-510AGM (VRLA) vs 16 CH 25P (FLOODED)

MODEL	LENGTH	WIDTH	HEIGHT	WEIGHT	8HR @ 1.75V	10HR @ 1.75V	20HR @ 1.75V	Max Discharge Current (5 sec)
16 CH 25P	33 2/3"	27"	20 1/2"	1238 lbs	590	617	686	2582 A
16-510AGM	39 5/8"	28 3/8"	19 1/2"	1173 lbs	488	510	561	2500 A