

FLOODED DEEP CYCLE BATTERY

6 FS L16-HC



Series	FS	Warranty	1 Year
Volts	6	Design	903
Cells	3	Plates/Cell	17
Terminal Type	DT		
Included Hardware	Stainless Steel K-Lock Nut		
Size & Thread	5/16"-18		

Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Recommended Charge Current	50 A
Maximum Charge Current	85 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	1040			
Marine Crank Amps (MCA) 32°F / 0°C	1299			
Reserve Capacity (RC @ 25A)	828 Minutes			
Reserve Capacity (RC @ 75A)	218 Minutes			
Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	489 AH	4.89 A
@ 72 Hour Rate	476 AH	6.61 A
@ 50 Hour Rate	459 AH	9.18 A
@ 20 Hour Rate	425 AH	21.25 A
@ 15 Hour Rate	400 AH	26.63 A
@ 10 Hour Rate	383 AH	38.25 A
@ 8 Hour Rate	366 AH	45.69 A
@ 5 Hour Rate	340 AH	68.0 A
@ 1 Hour Rate	200 AH	199.75 A

Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications

 SAI GLOBAL ISO 9001 Quality	Weight	55.5 kg	122.5 lbs
	Length	311 mm	12.25"
	Width	181 mm	7.13"
	Height Incl. Term.	425.5 mm	16.75"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.


Electrolyte Reserve	57 mm	2.25"
Container	High Density Polypropylene	
Cover	High Density Polypropylene	
Handles	Rope / Plastic Handle	

- Plastics are UL94 HB (UL94-V2 available)
- Plastics are impact copolymer rated to ASTM D256, D5420
- Vented design with integral flame arrestor vent caps

Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V

Detailed Illustration

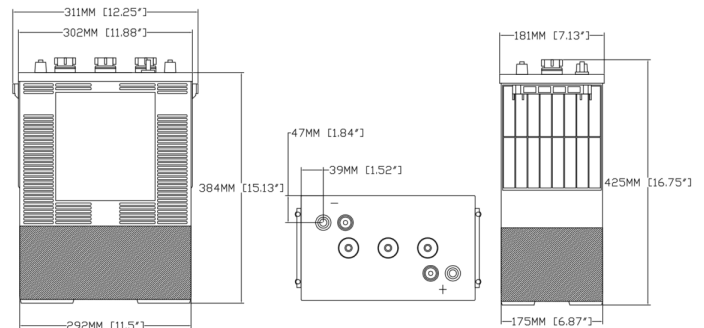

Designed in compliance with applicable BCI, DIN, BS & IEC standards. Tested in compliance to BCI & IEC standards.

intertek
0122624