



GOLF &amp; LIGHT EV

Series	R-Series LFP	Warranty	See Warranty Terms
Volts	48	BCI	
Terminal Type		M8	
Included Hardware		M8 stainless bolts & washers	

## Charge

Charge Voltage Range	56.0 - 58.4V	
Recommended End of Discharge Voltage	48.0 V	
End of Discharge Protection Voltage	40.0 V	
Recommended Charge Voltage	57.6 V	
Recommended Charge Current		
0~10°C (32-50°F)	0.2C	21A
10~35°C (50-95°F)	0.5C	52A
35~50°C (95-122°F)	0.2C	21A

## Charge Mode:

- Charge at recommend voltage & current by temperature until charge current drops to  $\leq 0.05C$  (CC,CV)
- DO NOT USE TEMPERATURE COMPENSATION
- No BTS (Battery Temperature Sensor)

Max Continuous Charge Current	100 A
Max Continuous Discharge Current	200 A
Surge Current Limit	900 A (300ms)
Charge Temperature Range	0°C~55°C (32~131°F)
Discharge Temperature Range	-20°~60°C (-4~140°F)
Storage Temperature Range	-5°~45°C (23~113°F)

## Capacity

Nominal Capacity	105 AH
Total Energy	5.38 kWh
Nominal Voltage	51.2 V

## Safety

- Prismatic LiFePO4 cells (UL1642) (UL2580)
- IEC62133 (cell), IEC62619(cell), UN38.3 (cell/pack)
- ROHS (cell), CE system certification, IP65 Rating

## Design

- Standard-size (BCI) ABS container for easy VRLA replacement
- Fast charge/discharge performance
- Maintenance-free operation
- Bluetooth Connectivity & dedicated IOS & Android App

## Battery Management System (BMS)

- Integrated hardware BMS inside
- Independent charge & discharge protection
- 48V surge current limits - 300A (30 sec), 500A (3 sec)
- Short-Circuit Protection, Over-Voltage Protection, Low-Voltage Protection, Over-Current Protection, Low-Temperature Protection, Over-Temperature Protection


## 48V LFP Profile

Specifications			
	Weight	45 kg	99 lbs
	Length	51.9 cm	20.4"
	Width	25.0 cm	9.84"
	Height Inc. Term.	26.5 cm	10.43"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container (Outer)	METAL
Handles	Integrated Top Mount
Internal BMS Model	16S200A
Expected Cycle Life	>6000 @ 80% DOD, >3000 @ 100% DOD
Series Connection	1 UNIT MAX
Parallel Connection	4 UNITS MAX

## Detailed Illustration

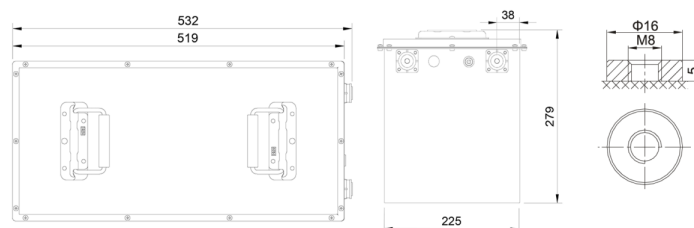

ISO9001



ISO14001



OHSAS18001

