



Series	GEL	Warranty	See Warranty Terms
Volts	2	Design	2V OPzV
Cells	1		
Terminal Type		F10	
Included Hardware		Threaded Insert & Bolt	

### Charge

Recommended Charge Current	200 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	0.16 mΩ

### Capacity

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
		105%	100%	89%


  

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	<b>2927 AH</b>	<b>29.27 A</b>
@ 20 Hour Rate	<b>2437 AH</b>	<b>121.85 A</b>
@ 10 Hour Rate	<b>2160 AH</b>	<b>216 A</b>

### Specifications

 SAI GLOBAL ISO 9001 Quality	Weight	156 kg	344 lbs
	Length	399 mm	15.71"
	Width	214 mm	8.43"
	Height Incl. Term.	799 mm	31.46"
Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.			
Container	ABS		
Cover	ABS		
Handles	None		

### Cycle Life vs. Depth of Discharge

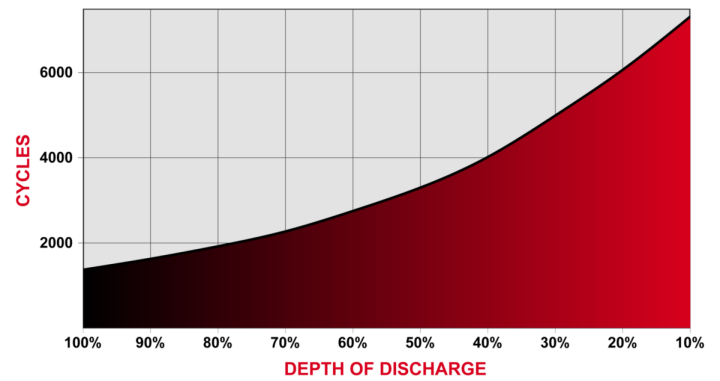

### Capacity vs. Temperature

