



Series	GEL	Warranty	See Warranty Terms
Volts	2	BCI	2V OPzV
Cells	1		
Terminal Type	F10		
Included Hardware	Threaded Insert & Bolt		

### Charge

Recommended Charge Current	200 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	0.16 mΩ

### Capacity

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	89%	79%
Hour Rate	Capacity / AMP Hour		Current / AMPS	
@ 100 Hour Rate	<b>2927 AH</b>		<b>29.27 A</b>	
@ 20 Hour Rate	<b>2437 AH</b>		<b>121.85 A</b>	
@ 10 Hour Rate	<b>2160 AH</b>		<b>216 A</b>	

### Specifications




Weight	156 kg	344 lbs
Length	39.9 cm	15.71"
Width	21.4 cm	8.43"
Height Inc. Term.	79.9 cm	31.46"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	None

### Cycle Life vs. Depth of Discharge

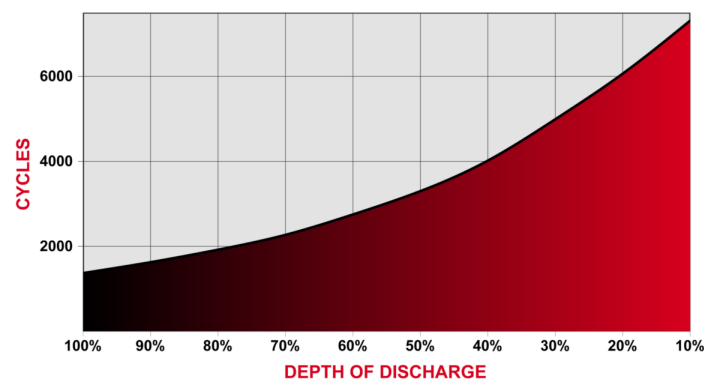

### Capacity vs. Temperature

